

Guardian TB 8040 sleeve range

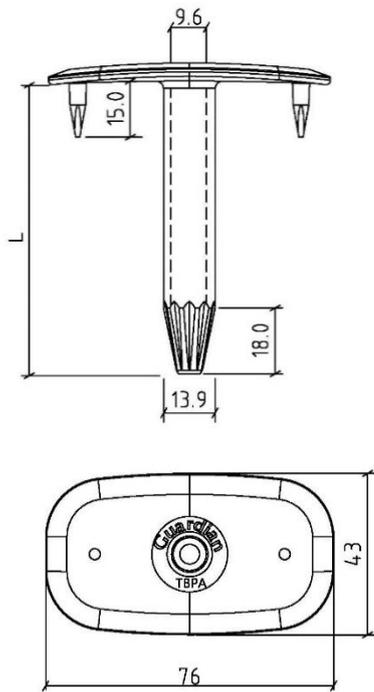


Fig. 5

Sleeve TBPA-8040 with two barbs (Polyamide)  
Sleeve TBPP-8040 with two barbs (Polypropylene)

Guardian R75 sleeve range

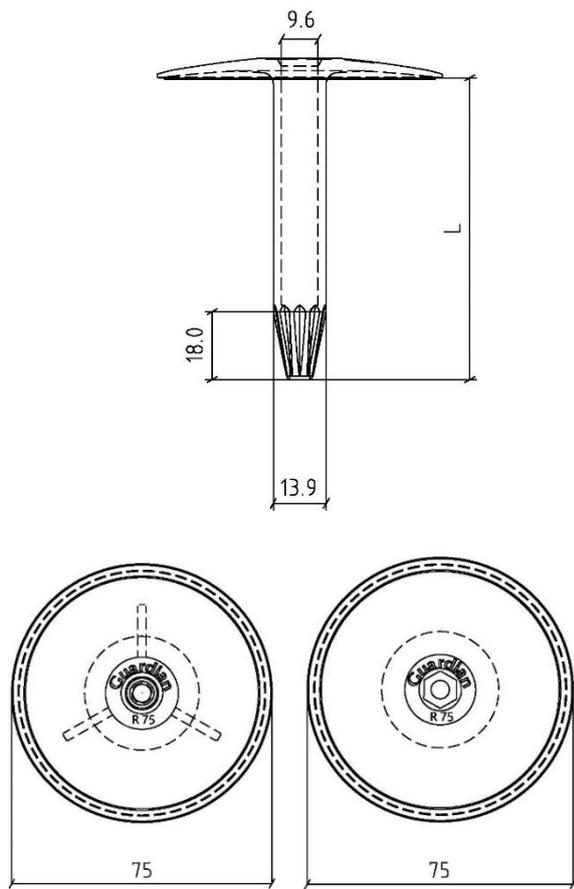


Fig. 6

Tube washer R-75  
Tube washer ASTL-75 with hexagonal internal tube shape (used together with ACS 6.1)

Guardian PP45 washer

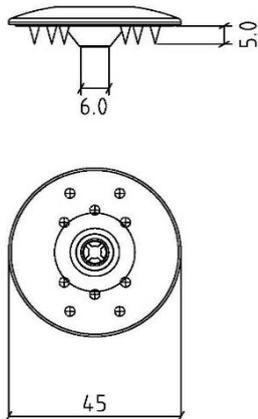


Fig. 7

Tube washer PP-45 with ten barbs for fixation of synthetic membranes

**Table 6: Pullover test of washer**

Washer	Fastener <sup>13)</sup> Guardian														R <sub>k</sub> : Characteristic values of axial load resistance	Durability according to EAD 030351-00-0402	
	ACS 6.1	BS 4.8	BS 5.5	BS 6.1	BS 6.8	BSHD 4.8	BSRF 4.8	CS 6.1 / CS S 6.1	DBT 4.8(-A)	DBT-S-4.8(-A)	HD 6.1	LBS 6.0 / LBS S 6.0	LBS-8.0 / LBS S 8.0	PS 4.8			TS 5.2
SP-40 – D/F/DD/FD	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	3.88	Approved
SP-40-LBS	-												X			4.29	Approved
SP-50-D. F. S	-	X	X	X	X	X	X	X	-	-	X	X	X	X	X	4.83	Approved
SPB-50-S	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	4.83	Approved
SP-70-D. F. S	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	2.88	Approved
SP 8240-D/F/S	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	5.30	Approved
SPA 8240-D/F	-	-	-	-	-	-	-	-	X	X	-	-	-	-	-	5.00	Approved
STBS	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	3.68	Approved
Sleeve R23 – STBT	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	1.78	Approved
Sleeve R23 – STBS7T15	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	1.78	Approved
Guardian screw-STBS7T15	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	3.68	Approved
STBST	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	3.68	Approved
Sarnabar + R23	X	X	X	X	X	X	X	X	-	-	X	X	-	X	X	1.78	Approved
Sarnabar + Guardian screw	-	X	X	X	X	X	X	X	X	X	X	X	-	X	X	5.00	Approved
GWSP (*)-80-F2E	-	-	X	X	X	-	-	X	-	-	-	X	-	-	X	2.48	Approved
Sleeve GWT + GWSP (*)-80-F4E	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	3.17	Approved
Sleeve R 50	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	1.58	Approved
Sleeve R 48	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	1.58	Approved
Sleeve RPA 48	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	3.00	Approved
Sleeve RB 48	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	1.58	Approved
Sleeve RBPA 48	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	3.00	Approved
Sleeve RBS 50	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	1.58	Approved
Sleeve R 75	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	1.58	Approved
Sleeve TBPP 8040	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	1.58	Approved
Sleeve TBPA 8040	-	X	X	X	X	X	X	X	-	-	X	X	-	X	X	2.52	Approved
PP 45	-	X	X	X	-	X	X	X	-	-	-	X	-	X	X	2.50	Approved
Sleeve ASTL-50	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.58	Approved
Sleeve ASTL 48 / ASTL 50	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.58	Approved
Sleeve ASTL 75	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.58	Approved
Sleeve R50-LN	-	-	-	-	-	-	-	-	-	-	-	-	X	-	-	1.58	Approved
Sleeve R48-LN	-	-	-	-	-	-	-	-	-	-	-	-	X	-	-	1.58	Approved
Sleeve R75-LN	-	-	-	-	-	-	-	-	-	-	-	-	X	-	-	1.58	Approved

<sup>13)</sup>Obtained values from the axial load test in different substrates (table 2 - 5) and the pullover test (table 6) of washers/sleeves are compared and the lowest of the two gives the characteristic value for the fastener / sleeve, washer combination of the application.